

SUREBOND TO CAP SHEET 470K24

Description

SureBond TO Cap Sheet 470K24 is an high performance APP modified bituminous membrane with a stabilised polyester reinforcement. The upper surface is finished with a mineral surface and the lower surface has a thermofusible polyethylene (PE) film.


Application

SureBond TO Cap Sheet Mineral 470K24 is used as a torch applied fully bonded top layer in a multi-layer roofing system or as a mechanically fastened single layer in both new build and renovation projects



Benefits

- ✔ The APP compound provides considerable advantages in terms of cold flexibility even after ageing
- ✔ The nonwoven stabilised polyester reinforcement provides high mechanical strength, tear and puncture resistance and dimensional stability
- ✔ When installed on stable substrates and regularly maintained, the system will have an expected lifespan in excess of 10 years
- ✔ Manufactured in accordance with ISO 9001:2015
- ✔ The standard black mineral finish provides extra protection against UV degradation
- ✔ A variety of other colours are available including light grey, green and olivine
- ✔ Fully accredited in the Netherlands by SGS INTRON under KOMO certificate number CTG-745-1
- ✔ A selection of compatible SureBond base layers are available depending on specification

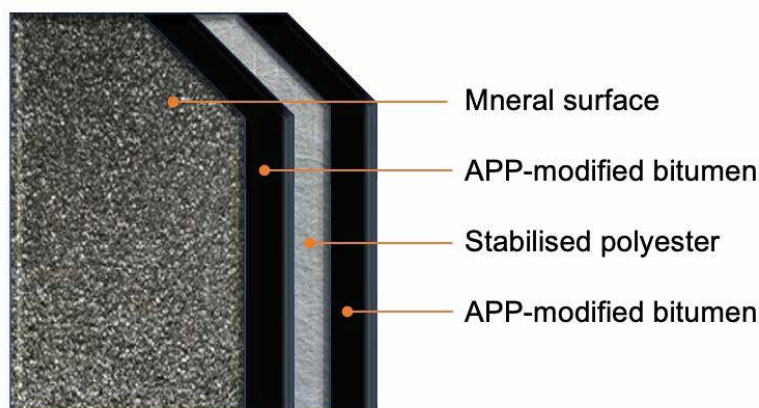

SUREBOND TO CAP SHEET 470K24


TECHNICAL DATA

	Unit		
Thickness on Selvedge	mm	3,3	4
Width	m	1	
Length	m	5,5	
Weight	kg/m ²	5	5,7
Roll Weight	kg	28	31
Tear Resistance L/T	N/5cm	750/600	
Elongation L/T	%	40/40	
Tear Resistance L/T	N	150/150	
Dimensional Stability L/T	%	-0,25/+0,15	
Cold Flexibility	°C	-15	
Floe Resistance	°C	130	
Rolls per Pallet		25	20

*All data subject to normal tolerances



Example Specification

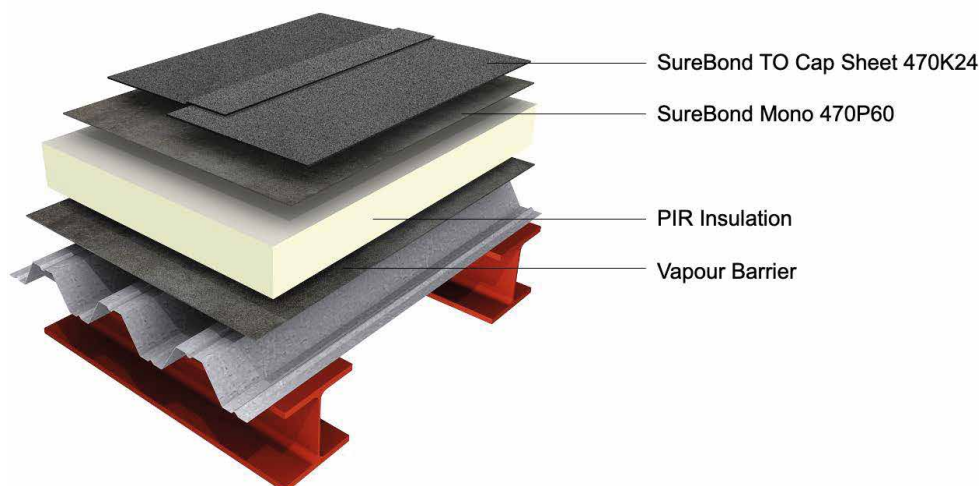

Complementary Products

- ▶ SureBond Mono 470P60
- ▶ SureBond TO Vapour Barrier
- ▶ SureBond Primer