

## SUREBOND TO CAP SHEET 470K14

### Description

SureBond TO Cap Sheet 470K14 is an high performance APP modified bituminous membrane with a stabilised polyester reinforcement. The top side has a plain unsurfaced finish with dotted talc and the lower surface has a thermofusible polyethylene (PE) film.


### Application

SureBond TO Cap Sheet 470K14 is used as a torch applied fully bonded top layer in a multi-layer roofing system or as a mechanically fastened single layer in both new build and renovation projects



### Benefits

- ✔ The APP compound provides considerable advantages in terms of cold flexibility even after ageing
- ✔ The nonwoven stabilised polyester reinforcement provides high mechanical strength, tear and puncture resistance and dimensional stability
- ✔ Manufactured in accordance with ISO 9001:2015
- ✔ Fully accredited in the Netherlands by SGS INTRON under KOMO certificate number CTG-745-1
- ✔ A selection of compatible SureBond base layers are available depending on specification

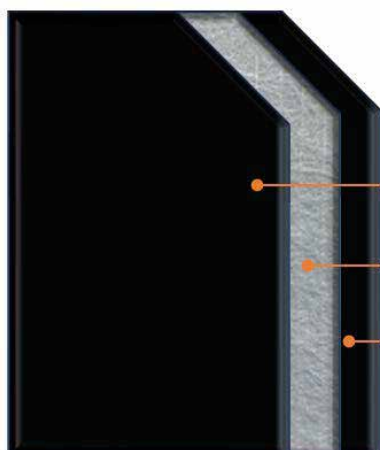

APP-modified bitumen

Stabilised polyester

APP-modified bitumen

## SUREBOND TO CAP SHEET 470K14


### TECHNICAL DATA

	Unit	
Thickness	mm	4
Width	m	1
Length	m	5,5
Weight	kg/m <sup>2</sup>	5
Roll Weight	kg	28
Tear Resistance L/T	N/5cm	750/600
Elongation L/T	%	40/40
Tear Resistance L/T	N	150/150
Dimensional Stability L/T	%	-0,25/+0,15
Cold Flexibility	°C	-15
Flow Resistance	°C	130
Rolls per Pallet		25

\*All data subject to normal tolerances



### Example Specification

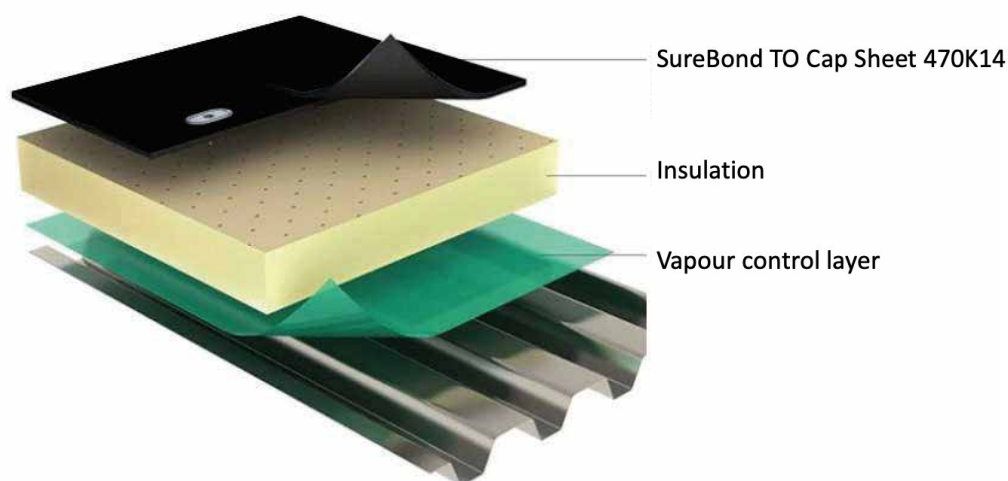

### Complementary Products

- ▶ SureBond Mono 470P60
- ▶ SureBond TO Vapour Barrier
- ▶ SureBond Primer